

CITY OF GALLUP
CENTRAL PURCHASING OFFICE
P.O. BOX 1270
GALLUP, NEW MEXICO 87305-1270
Phone: 505-863-1232; Fax: 505-722-5133

**NTUA – TWIN LAKES WELL / NGWSP REACH 12A
CITY OF GALLUP
Gallup Joint Utilities**

**FUNDED BY THE WATER TRUST BOARD THROUGH THE NEW MEXICO FINANCE
AUTHORITY, GRANT NO. WTB #111**

AMENDMENT NO.: One (1)
PAGES: # (19)

FORMAL BID NO.: 1612

THE FOLLOWING REVISIONS, ADDITIONS AND/OR CLARIFICATIONS SHALL FORM A PART OF THE CONTRACT DOCUMENTS AND EACH BIDDER SHALL INDICATE ON THEIR BID THE RECEIPT OF THIS NUMBERED AMENDMENT. REVISIONS, ADDITIONS, AND/OR CLARIFICATIONS ARE AS FOLLOWS:

Attached is the Revised Bid Proposal, the Flush Type Hydrant Detail, Photos of the well house, NTUA Tap Permit, the Attendance sheet from Pre-Bid viewing held on April 12, 2016, and the Plan Holders list as of 5/26/16. These are pages 6 thru 19 of this Amendment.

This Amendment No. 1 Contains the Following:

- Revisions and Additions to the Project Specifications and Drawings
- Questions and Answers from the 5/17/16 Pre-Bid Site Viewing
- Responses to Inquiries received by the City of Gallup and DePauli Engineering & Surveying, LLC and Miscellaneous Clarifications
- Revised Bid Proposal – 2 pages (pg. 6-7)
- Flush Type Fire Hydrant Detail - 1 page (page 8)
- Photos of the well house – 3 pages (pages 9-11)
- NTUA Tap Permit – 5 pages (pages 12-16)
- Pre-Bid Viewing Attendance Sheet – 1 page (page 17)
- Plan Holders List as of 5/26/2016 – 2 pages (pages 18-19)

REVISIONS AND ADDITIONS TO THE PROJECT SPECIFICATIONS AND DRAWINGS.

Revisions to Bid Proposal

- The original bid proposal is hereby replaced with the attached Revised Bid Proposal. All bids shall be submitted on the Revised Bid Proposal Forms.

Revisions to Special Conditions

- Special Conditions, SC-25, Item 8: The language describing the item of work is hereby replaced with the following language:

This item of work is flush type fire hydrant assembly, Mueller A-415 5¼” flush type fire hydrant or equal as detailed including two (2) – 25’ hoses with 2½” N.S. threaded brass ends complete and in place. Fire hoses to be turned over to NTUA. Payment will be made at the **Contract Lump Sum Price Bid**:

Additions to Project Drawings

- The attached Flush Type Fire Hydrant Detail is hereby made part of the project drawings.

END OF REVISIONS AND ADDITIONS TO THE PROJECT SPECIFICATIONS AND DRAWINGS.

**RESPONSES TO INQUIRIES RECEIVED BY THE CITY OF GALLUP AND DEPAULI
ENGINEERING & SURVEYING AND MISCELLANEOUS CLARIFICATIONS ADDRESSED
DURING PROJECT PRE-BID SITE VIEWING ON TUESDAY, MAY 17, 2016 AT 9:00AM.**

Responses and Inquires addressed at during the Pre-Bid Site Viewing at the office of DePauli Engineering & Surveying, LLC and at the project site:

I: *Do we test the 42"?*

R: No, all new 6" and 8" line will require testing. The existing capped 6" waterline leaving the station building also requires testing

I: *Is the tee MJ or flange?*

R: The existing tee on the 42" waterline is flanged.

I: *How many days is the project?*

R: The project shall be completed within 60 days.

I: *Does coordination go through NTUA or DePauli Engineering?*

R: Coordination with both entities is required.

I: *Do we need NTUA Permits?*

R: Yes, an NTUA Tap Permit is required.

I: *Will Navajo Nation Sovereignty laws apply to this job?*

R: There is no Navajo Preference on this job.

I: *How deep is the line?*

R: The new line shall be installed with a minimum bury of 4' with the exception of crossing the existing 42" waterline. See plan, profiles, and details.

I: *What does cleaning up the pump house consist of?*

R: The only work to be performed on the pump house is removing weeds, trash and debris from the area inside the chain link fence.

END OF PROJECT VIEWING INQUIRIES AND ANSWERS

**RESPONSES TO INQUIRIES RECEIVED BY THE CITY OF GALLUP AND DEPAULI
ENGINEERING & SURVEYING AND MISCELLANEOUS CLARIFICATIONS**

Contractor Questions: (Questions are taken directly from contractor or supplier emails)

Q: *General Utility Construction Note 31 states "Bore hole and test pit data is contained in the contract documents." Please provide the location of this information.*

A: There is no bore hole or test pit data for this project. General Utility Construction Note 31 is hereby deleted from the project drawings.

- Q:** *Is the 7'x7'x6' reinforced concrete thrust block shown on the Reach 12A Connection detail on Sheet 3 existing?*
- A:** The 7'x7'x6' reinforced concrete thrust block on the 42" waterline tee is existing.
- Q:** *What is the length of the existing waterline between the adjacent valves being closed to perform the installation of the Reach 12 Connection?*
- A:** The distance between valves is 1.82 miles. However, the 42" line is empty and is currently not in use.
- Q:** *What time of day can the existing waterline be shut down?*
- A:** The 42" waterline is currently not in use and a "shutdown" will not be required.
- Q:** *What duration can the existing waterline be shut down?*
- A:** The 42" waterline is currently not in use and a "shutdown" will not be required.
- Q:** *Can the existing soil displaced by the lean fill at the Reach 12A Crossing and pipe bedding along the new waterline be disposed of on-site?*
- A:** Any excess native material can be used for trench backfill or it will need to be removed from the site.
- Q:** *The tenth item on the Bid Proposal is numbered 8.*
- A:** The tenth item on the Bid Proposal is hereby renumbered from #8 to #10. Please see the attached revised bid proposal.
- Q:** *Please provide the missing amount for material testing item on the Bid Proposal to be used for totaling bid.*
- A:** The "Unit Price" & "Amount" values is hereby set to \$3,500.00 Please see the attached revised bid proposal.
- Q:** *Information for Bidders Section 22 states "A New Mexico Department of Transportation (NMDOT) Utility permit for this project has been obtained by the City, and is contained herein. Please provide a copy of the NMDOT Utility Permit.*
- A:** The work associated with this project does not require a NMDOT utility permit. All language in regard to NMDOT utility permits is hereby deleted.
- Q:** *Information for Bidders Section 22 states "An NTUA tap permit is also required. Permit application forms and requirements are included in Appendices "C" and "F". Please provide copies of the permit application forms and requirements.*
- A:** The NTUA tap permit form is attached. Contact David Shultz with NTUA for coordination and additional information by phone at (928) 729-6277 or by email at davids@ntua.com
- Q:** *The description of bid item 4 on sheet SC-6 includes "protection bollards", however, the Type 1 Air Release Detail on sheet 5 does not include protection bollards. Please provide the number, location, and a detail for any protection bollards required.*
- A:** The detail calls for two (2) bollards to be installed as directed to protect the bollard. See the details notes.

- Q:** *The description of bid item 6 on sheet SC-6 includes “cleaning of the building”. Please provide a detailed description of what is required for the building to be considered clean.*
- A:** All debris, trash, and weeds within site fencing shall be removed and properly disposed of at appropriate facilities. Building shall be swept clean and mopped with disinfectant cleaning solution. Piping and chlorination equipment shall be salvaged to NTUA.
- Q:** *Section 504.4 Painting includes coating specifications for exterior and interior wood surfaces, as well as, masonry surfaces. There are no exterior and interior wood surfaces or masonry surfaces being installed under this contract. Please provide a list of any existing surfaces that are intended to be painted under this contract.*
- A:** No painting is anticipated on the existing wood and masonry surfaces. However, all surfaces damaged or marred during construction shall be repaired in accordance with Technical Specification 504.4.
- Q:** *Please issue a copy of the Flush Type Fire Hydrant detail provided at the Pre-Bid viewing by Addendum so that it is part of the contract document and available to all bidders.*
- A:** The detail is include and has been made part or the contract documents.
- Q:** *Please provide photos of the interior of the well house including both the chlorination room and metering and control room.*
- A:** Photos of the station interior have been attached.
- Q:** *Please provide contact information for someone who can provide access for a site visit of the well house.*
- A:** No site visit is currently planned to the facility. Contact David Shoultz with NTUA for coordination and additional information by phone at (928) 729-6277 or by email at davids@ntua.com
- Q:** *What is the depth of the existing 42” steel waterline at the tie-in location?*
- A:** The 42” waterline is as-built with a bury of 5.3’± (surface to top of pipe) the centerline of the pipe is 7’± below the surface. The depths are shown on the Reach 12A Crossing Detail.
- Q:** *Appendix B Section 6 Classifications of Construction includes a table with 2 wage decision classifications. Do the wage decision classifications only apply to the descriptions of the work adjacent to them? For example, the General Building (B) wage decision only applies to the “New ductile iron pipe, water meter fitting, valves and appurtenances will be installed within the existing building...”?*
- A:** The wage rate decision for the project has two classifications of work and rates. All work within 5’ of the building shall use the General Building (B) wage rates. All work beyond 5’ of the building shall use the Highway/Utilities (A) wage rates. Visit the New Mexico Department of Workforce Solutions website for more information and clarifications in regards to the classifications of construction.

END OF RESPONSES TO INQUIRIES RECEIVED BY THE CITY OF GALLUP AND DEPAULI ENGINEERING & SURVEYING AND MISCELLANEOUS CLARIFICATIONS

Bid opening time and date remain unchanged.

City of Gallup:

DATE: May 26, 2016

BY/S/ Frances Rodriguez, CPPB
Frances Rodriguez, CPPB,
Purchasing Director

Acknowledge
Receipt No. One (1)

Contractor:
BY/S/ _____
Authorized Signature of Seller/Bidder

Company Name: _____

[ACKNOWLEDGE RECEIPT ON BID OR SIGN AND RETURN ONE (1) COPY WITH BID]

REVISED BID PROPOSAL
NTUA - TWIN LAKES WELL / NGWSP REACH 12A CONNECTION
 FUNDED BY THE WATER TRUST BOARD THROUGH THE NEW MEXICO FINANCE AUTHORITY, WTB #111
 FORMAL BID NO. 1612
 MAY, 2016

All,

The undersigned Bidder, in compliance with your invitation for bids for NTUA - TWIN LAKES WELL / NGWSP REACH 12A CONNECTION, having examined the Plans, Specifications and related documents, sites and conditions of the proposed work and being fully advised as to the materials, supplies, equipment and labor required for the construction of the project, and the time and method of payment for work performed, hereby proposes to furnish all labor, materials and supplies, and to construct the project in accordance with terms of the contract documents, within the time set forth therein, for the prices stated below. The prices are to cover all expenses incurred in completing the work under contract.

The Bidder agrees to commence work under this contract on or before the date specified in a written "Notice to Proceed" issued by the Owner or his representatives and to fully complete the project within sixty (60) consecutive calendar days thereafter, including weather delays. The Bidder also agrees to meet other scheduling requirements of these contract documents.

NTUA-TWIN LAKES WELL / NGWSP REACH 12A CONNECTION

ITEM	DESCRIPTION	ESTIMATED QUANTITY	UNIT PRICE	AMOUNT
1	This item is for 8" DIP CI 350 US PIPE TR FLEX (or equal) waterline complete and in place for the Unit Price per Linear Linear Foot of:	215 LF	\$ _____	\$ _____
2	This item is for 8" AWWA C509 resilient wedge gate valves complete and in place for the Unit Price per Each of:	2 EA	\$ _____	\$ _____
3	This item is for a tie in to the existing 42" steel pipeline complete and in place for the Lump Sum Price of:	LS	\$ _____	\$ _____
4	This item is for type 1B air release valve assembly complete and in place for the Unit Price per Each of:	1 EA	\$ _____	\$ _____
5	This item is for pressure testing of existing buried pipe and fitting and a tie in to the existing 6" DIP at the well house complete and in place for the Lump Sum Price of:	LS	\$ _____	\$ _____
6	This item is for station modifications within the building including new piping, valves, fittings, air release valve and appurtenances, cleaning and removal of unused chlorination equipment complete and in place for the Lump Sum Price of:	LS	\$ _____	\$ _____
7	This item is for station magnetic flow meter including electrical and control conduit and wiring and connection to NTUA SCADA System, complete and in place for the Lump Sum Price of:	LS	\$ _____	\$ _____
8	This item is for a flush type fire hydrant assembly with two (2) 25' hoses complete and in place for the Lump Sum Price of:	LS	\$ _____	\$ _____

NTUA-TWIN LAKES WELL / NGWSP REACH 12A CONNECTION

ITEM	DESCRIPTION	ESTIMATED QUANTITY	UNIT PRICE	AMOUNT
9	This item is for 4" thick gravel surfacing compacted, complete and in place for the Unit Price per Square Yard of:	100 SY	\$ _____, ____	\$ _____, ____
10	For materials testing by independent lab (soil, concrete, base course, etc.). This amount to be used for totaling bid. Actual amount paid to be based on approved invoice.	LS	\$3,500.00	\$3,500.00

Subtotal: \$ _____, ____

NMGRT Tax @ 8.3125%: \$ _____, ____

Navajo Nation Tax @ 5%: \$ _____, ____

TOTAL AMOUNT: \$ _____, ____

The undersigned Bidder understands that the Owner reserves the right to reject any or all bids and to waive any informalities in the bidding.

The undersigned Bidder agrees to enter into a contract for completion of the project within fifteen (15) days from the date of acceptance of this proposal. Upon receipt of written notice of acceptance of his bid, Bidder will execute the formal contract documents attached within fifteen (15) days & deliver the Surety Bond as required. The Bid Bond attached hereto is to become the property of the Owner in the event the Contract and Bond are not executed within the time above set forth, as liquidated damages for the delay and expense incurred by the Owner

RECEIPT OF THE FOLLOWING ADDENDA
NO'S IS HEREBY ACKNOWLEDGED:

Addendum No. 1: _____ Date: _____

Addendum No. 2: _____ Date: _____

Addendum No. 3: _____ Date: _____

RESPECTFULLY SUBMITTED:

By: _____

Title _____

e-mail address _____

Business Address _____

City _____

State _____

Zip Code _____


CONTRACTOR'S LICENSE NO. & CLASSIFICATION

NEW MEXICO DEPARTMENT OF WORKFORCE SOLUTIONS NO.


Bidders Checklist of Submittal Documents

- Bidder's Qualification Statement (2 Pages)
- Subcontractor's Listing (1 Page, attach additional pages if needed)
- Price Proposal Forms
- Bid Bond (5%) (2 Pages)
- Acknowledge Receipt of Amendments (If any)
- Notice of Extended Payment Provision
- Current I.R.S. Form W-9
- NM Resident Contractors Certificate or Resident Veterans Contractor Preference Certificate

NOTE: CONTRACTOR TO PROVIDE HYDRANT BARREL HEIGHT AS REQ'D. FOR PROPER HEIGHT ABOVE FINISHED GRADE. FIRE HYDRANTS TO BE INSTALLED PLUMB AND IN AREAS TO CLEAR EXISTING OR ANY FUTURE SIDEWALKS.

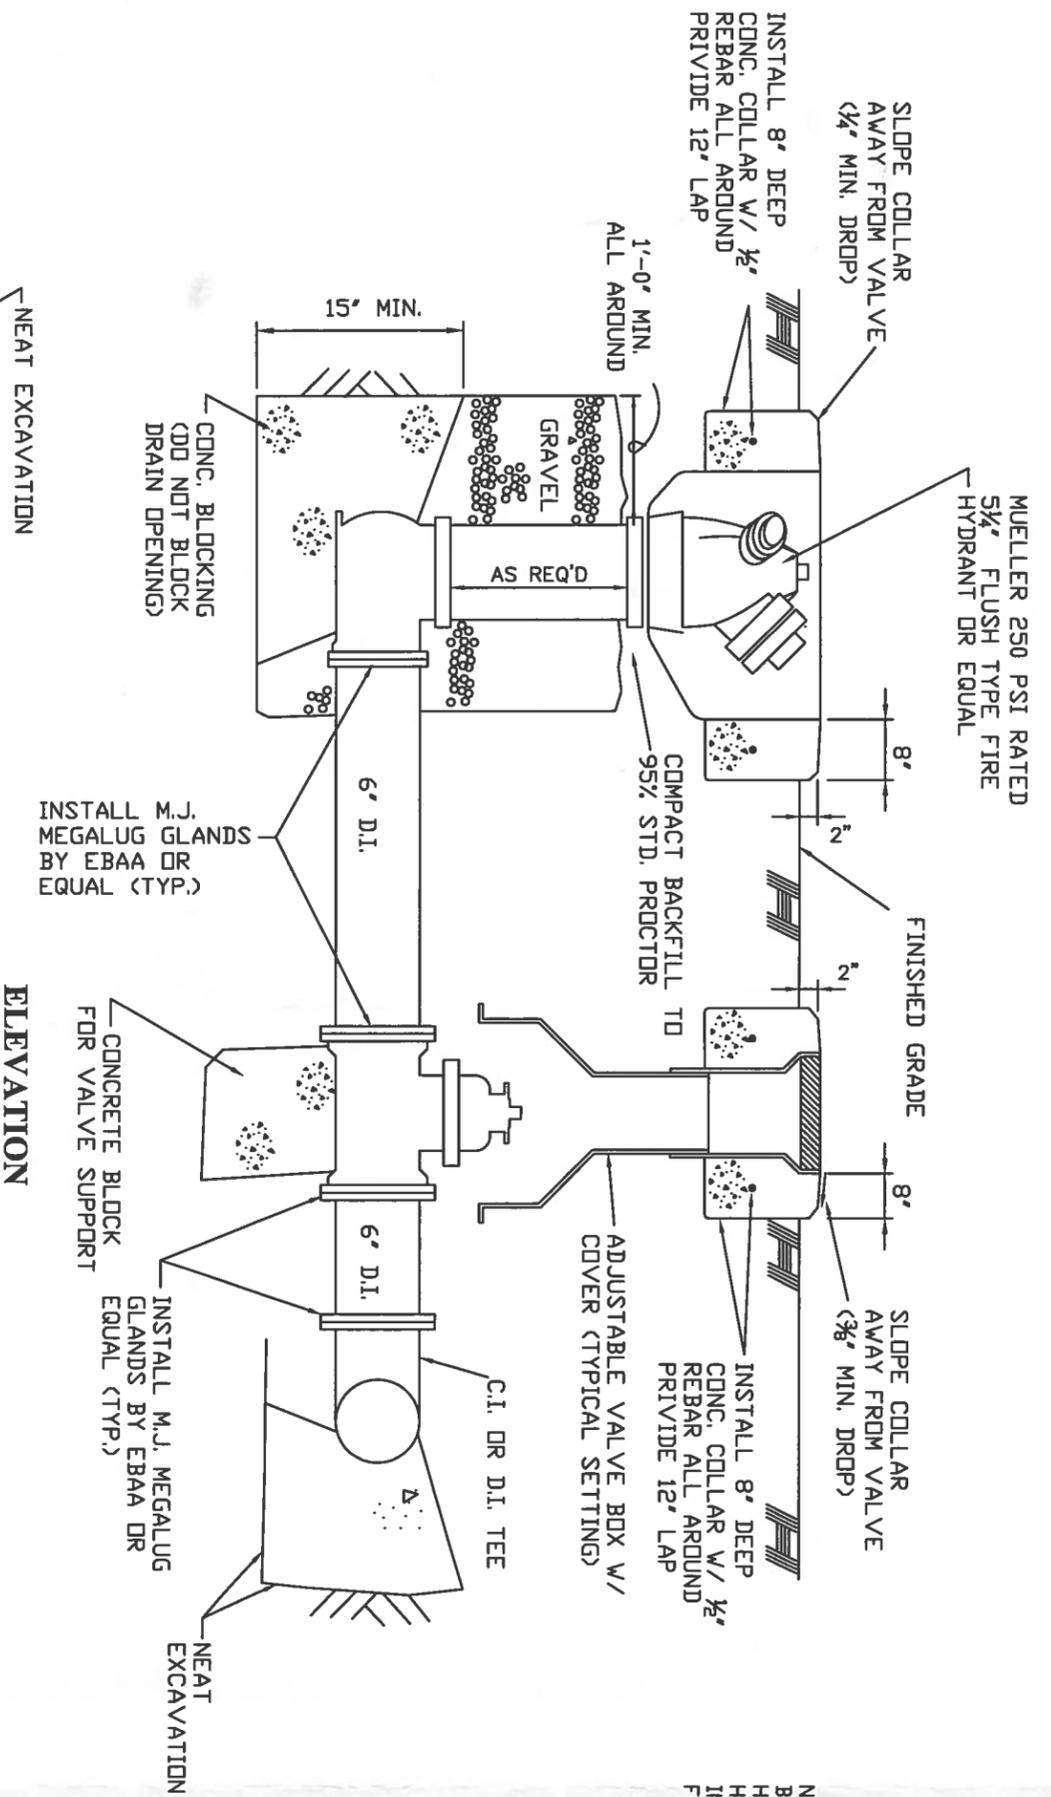

ELEVATION

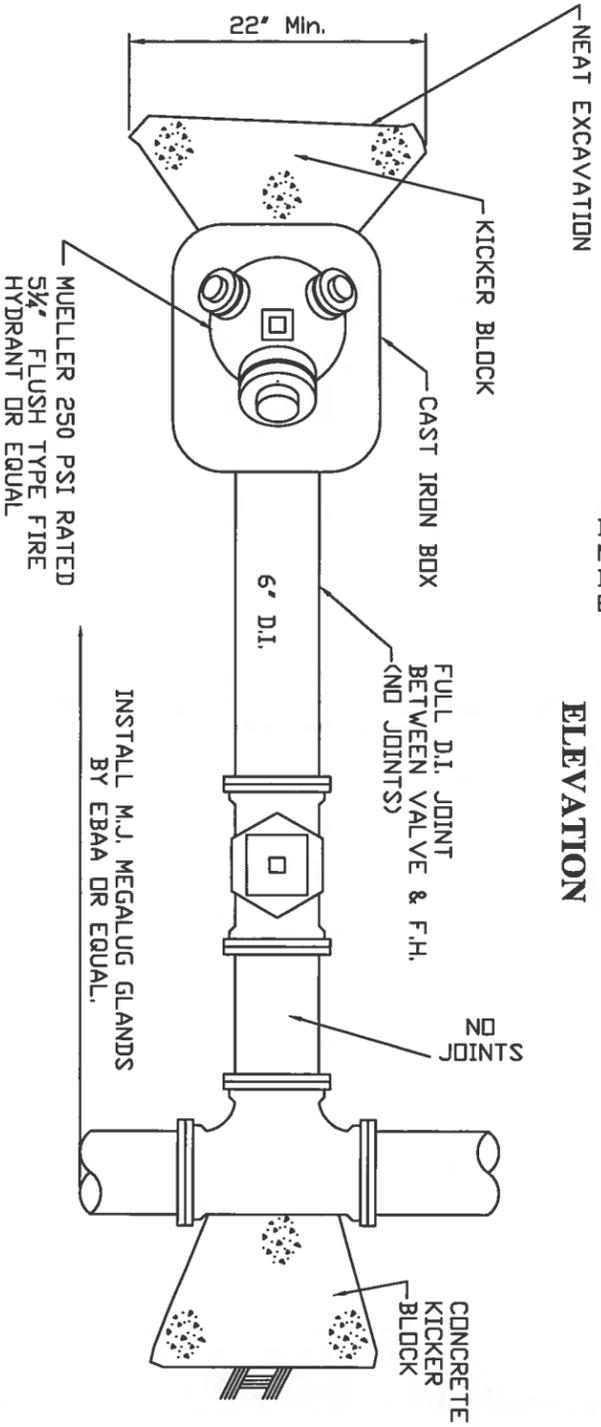

PLAN

FLUSH TYPE FIRE HYDRANT DETAILS

NOTICE OF EXTENDED PAYMENT PROVISION:
THIS CONTRACT ALLOWS THE OWNER TO MAKE PAYMENT WITH IN 45 DAYS AFTER SUBMISSION OF AN UNDISPUTED REQUEST FOR PAYMENT.

CAUTION

CALL NEW MEXICO ONE CALL
811
BEFORE YOU DIG!

8

NO.	BY	DATE	REVISIONS

Twin Lakes Well Station Pictures
taken September 2, 2015

Picture #1 – Station exterior



Picture #2 – Pump/Control Room South Wall



Note the edge of the existing 6" flange for new discharge piping in the lower left corner of the picture

Picture #3 – Pump/Control Room North Wall



Picture #4 – CL2 Room East Wall



Picture #5 – CL2 Room East Wall #2



Picture #6 – CL2 Room West Wall



PERMISSION TO TAP AN EXISTING NTUA WATER LINE
INSTRUCTIONS

This form is to be filled out in duplicate and submitted at least ten working days prior to the requested date of execution of the tap. The ten working days is to allow for scheduling of an NTUA inspector and in no way implies that a full review with permission to tap being approved or disapproved will be issued in that time period. Please note that permission to tap is contingent upon an approved construction package.

Upon approval, a copy of the approval will be sent to the requestor with NTUA retaining the original copy.

All addresses are to include the Zip Code.

All telephone numbers are to include the Area Code.

- 1a. Permanent address and telephone number.
- 1b. Local address and telephone number. If the same as 1a., then write "1a." in the address space.
2. If the agent to coordinate with NTUA is the same as 1a. or 1b., then write the appropriate number and letter in the name space. In most cases, this is the owner or his agent and not a contractor.
3. If the same as 1a., 1b., or 2., then write the appropriate number and letter in the name space. If it is a P.L. 86-121, write "P.L. 86-121", in the name space.
4. Self-explanatory.
5. Self-explanatory.
6. One copy of request, specifications, and drawings is to remain at the receiving office. The original request form and two copies of both the specifications and drawings are to be forwarded to the Operations Manager unless this is a P.L. 86-121 Project.

If this is a P.L. 86-121 Project, the documents will be sent to the NTUA Headquarters Operation Department. If it is a P.L. 86-121 Project and the drawings have previously been submitted to NTUA Headquarters, an "X" with the NAIHS project number, e.g. "X/80-123", is to be written in the space above "NO". Specification submission on P.L. 86-121 Projects is generally not a requirement. NTUA Headquarters will request P.L. 86-121 specifications when needed.

If both sewer and water taps are requested and covered in the same set of drawings and specifications, the original copies of the requests and three copies of the drawings and specifications are to be forwarded to the appropriate NTUA Headquarters Department.

Under any "No" conditions other than P.L. 86-121 Projects, the "X" is written in the "No" space and a note of explanation attached.

Before forwarding the documentation, the drawing will be checked for:

- a. the basis of elevation is given by showing the bench-mark identification, location and elevation;
- b. a description of the tap point that gives specific ties to existing drawings in NTUA possession;
- c. the critical fire hydrant or fire flow supply point is shown and indicated as the critical point;
- d. and the portions of the proposed system that is to be transferred to the NTUA for operation and maintenance is indicated.

Item "d" above does not apply to P.L. 86-121 Projects since this is covered in detail in other documents.

7. The type of service as far as domestic, commercial, or industrial and permanent or temporary service, e.g., "permanent domestic", will be stated. If commercial or industrial, then more information is needed.
8. Self-explanatory.
9. Self-explanatory.
10. Hours of the day as well as date(s), are expected entries in this space.
11. Signature of persons in 1, 2, and 3 with date of signature are required. If this is a P.L. 86-121 Project, "P.L. 86-121" will be written in the space for the third signature.
12. Self-explanatory.
13. Self-explanatory.
14. Attach a list of district operational constraints and current operating problems that affect or will be caused by the approval of this permission to tap. If there are no operational constraints or problems, write "NOP" beside the date of the signature.
15. Self-explanatory
16. Hours of the day, as well as date(s), are expected entries in this space.
17. Self-explanatory. A list of restrictions on the approval will be attached unless "NOP" is written beside the date of signature.

PERMISSION TO TAP AN
EXISTING NTUA WATER LINE

1. REQUESTER.

NAME : _____
TITLE : _____
ORGANIZATION : _____
a. ADDRESS : _____

TELEPHONE NUMBER : _____
b. ADDRESS : _____

TELEPHONE NUMBER : _____

2. PERSON RESPONSIBLE FOR TAP CONSTRUCTION AND ITS ACCEPTANCE BY NAVAJO TRIBAL UTILITY AUTHORITY.

NAME : _____
TITLE : _____
ORGANIZATION : _____
ADDRESS : _____

TELEPHONE NUMBER : _____

3. PERSON RESPONSIBLE FOR PAYING NAVAJO TRIBAL UTILITY AUTHORITY FOR SERVICE AFTER THE CONSTRUCTION IS COMPLETED AND APPROVED.

NAME : _____
TITLE : _____
ORGANIZATION : _____
ADDRESS : _____

TELEPHONE NUMBER : _____

4. DATE REQUEST IS SUBMITTED TO NAVAJO TRIBAL UTILITY AUTHORITY.

DATE : _____

5. SUBMITTED TO.

NAME : _____
TITLE : _____
NTUA OFFICE : _____

6. SPECIFICATIONS AND DRAWINGS OF PROPOSED CONSTRUCTION ATTACHED.

_____ YES _____ NO _____

PERMISSION TO TAP (WATER)
PAGE TWO

7. ACTUAL SERVICES.

ACTUAL NUMBER : _____
 METER SIZE : _____
 TYPE OF SERVICE : _____

8. WATER DEMAND/CUSTOMER REQUESTED FLOW AND MINIMUM DELIVERY PRESSURE AT THE METER OUTLET.

NORMAL : _____ gpm
 PEAK : _____ gpm
 PRESSURE : _____ psi
 @ ELEVATION OF : _____ feet above MSL

9. FIRE FLOW DEMAND IS NOT GUARANTEED AND IS ONLY WHAT THE SYSTEM WILL PROVIDE.

FOR NTUA INFORMATION: Flow and minimum delivery pressure at the meter outlet.

	<u>Sprinkler System</u>	<u>Total Fire Hydrant Flow</u>	
QUANTITY :	_____	_____	gpm
DURATION :	_____	_____	minutes
PRESSURE :	_____	_____	psi
SIMULTANEOUS USE :	_____	_____	(YES/NO)

10. REQUESTED TIME(S) AND DATE(S) OF ACTUAL EXECUTION OF THE TAP.

TIME(S)/DATE(S) : _____

11. I AGREE TO THE APPLICATION OF NAVAJO TRIBAL UTILITY AUTHORITY (NTUA) CONSTRUCTION METHODS, MATERIAL STANDARDS, LINE TEST PROCEDURES, DISINFECTION REQUIREMENTS, "CONSTRUCTION WATER" POLICY, AS-BUILT DRAWING REQUIREMENTS, AND TARIFF REQUIREMENTS AS THEY PERTAIN TO TAPPING THE EXISTING NTUA WATER LINE, CONSTRUCTING UTILITIES TO BE TRANSFERRED TO NTUA FOR OPERATIONS AND MAINTENANCE, AND SERVICES PROVIDED BY NTUA THEREAFTER.

SIGNATURE

DATE

SIGNATURE

DATE

SIGNATURE

DATE

PERMISSION TO TAP (WATER)
PAGE THREE

12. ASSIGNED NTUA INSPECTOR'S NAME.

INSPECTOR NAME : _____

13. IS THIS SERVICE DOWNSTREAM FROM A PREVIOUSLY MASTER METERED AREA?

YES

NO

14. REVIEWED BY.

DISTRICT MANAGER OR: _____
SUB-OFFICE SUPV. NAME DATE

15. SPECIFICATIONS AND PROPOSED CONSTRUCTION DRAWINGS REVIEWED AND APPROVED BY.

SIGNATURE

TITLE

DATE

16. APPROVED TIME(S) AND DATE(S) OF EXECUTION OF THE TAP.

TIME(S)/DATE(S) : _____

17. PERMISSION TO TAP APPROVED BY.

NTUA OPERATIONS DEPARTMENT

DATE

**NTUA – Twin Lakes Well / NGWSP Reach 12A Connection
City of Gallup Formal Bid No. 16**

Funded by the Water Trust Board through the NM Finance Authority, WTB #111

Pre-Bid Viewing 5/19/16

9:00am DES 307 S. 4th Street, Gallup, NM

NAME	COMPANY	PHONE /E-MAIL
Kurt Spolar	DES	863-5440/ kuspolar@depauliengineering.com
Daniella Aretino	DES	863-5440/ daretino@depauliengineering.com
Glen Shipp	Gandy Dancer	362.7034 Glen.Shipp@GandyDancer.com
James Cruz	File Const LLC	505-554-1780 JCruz@fconst.com
LEI CRISWELL	CENTURY CLUB CONST.	LEI@CENTURYCLUBCONSTRUCTION.COM
David Dallyn	Dallyn Corp	dvd@dallyn.com
Kevin Miller	GandyDancer	362-8896 Kevin.Miller@Gandydancer.net
KENI FOWLER	KFOWLER Const	9283802597 naadiin@msn.com
William Rivera	Total Contracting Services	505-321-3881 Wrivera@tcsi.us
Royce Smith	Gandy Dancer	505-270-1184 RSmith@GandyDancer.com

BIDDERS LIST
CITY OF GALLUP, FORMAL BID NO. 1612
NTUA-TWIN LAKES WELL/NGWSP REACH 12A CONNECTION
BID OPENING: 06/1/2016 AT 2:00 pm
ENGINEERS ESTIMATE: \$95,000

SET #	SENT TO	PHONE # FAX #	DATE	ADDENDUM No. 1	RETURNED
1	DePauli Engineering & Surveying Office Copy	Phone: (505) 863-5440 Fax: (505) 863-1919			
2	Frances Rodriguez City of Gallup	Phone: (505) 863-1334 Fax: (505) 722-5133	Delivered 5/13/2016		
3	Dave Shoultz NTUA	Phone: (928) 729-6277 Fax: (928) 729-6241	Delivered 5/13/2016		
4	Gary Munn City of Gallup	Phone: (505)863-1289 Fax: (505) 726-1278	Delivered 5/13/2016		
5	Dodge Data & Analysis 3315 Central Avenue Hot Springs, AR 71913	Phone: (951) 547-4485 Fax: (800) 768-5594	USPS 5/13/2016		
6	Construction Reporter 1609 2nd St. NW Albuquerque, NM 87102	Phone: (505) 243-9793 Fax: (505) 242-4758	USPS 5/13/2016		
7	The Plan Room at Sun Glass 648 West Broadway Farmington, NM 87401	Phone: (505) 327-0700 Fax: (505) 324-9885	USPS 5/13/2016		
8	Builders News and Plan Room 3435 Princeton NE Albuquerque, NM 87107	Phone: (505) 884-1752 Fax: (505) 883-2825	USPS 5/13/2016		
9	Total Contracting Services, Inc. 2424 Filvera Ct. SW Albuquerque, NM 87105	Phone: (505) 800-7156 Fax: (505) 847-3612	Fed Ex 5/17/2016		
10	Gandy Dancer 5801 Bobby Foster Rd. Ste. A Albuquerque, NM 87105	Phone: (505) 873-2222 kevin.miller@gandydancer.net	Pick Up 5/19/2016		
11	Century Club Construction 8201 Golf Course RD NW Ste D3 #295 Albuquerque, NM 87120	Phone: (505) 344-1096 Fax: (505) 847-3612 levi@centuryclubconstruction.com	Pick Up 5/19/2016		
12	Kfowler Construction, LLC P.O. Box 3189 Tuba City, AZ 86045	Phone: (928) 380-2597 Fax: (505) 4740766	Pick Up 5/19/2016		

**CITY OF GALLUP, FORMAL BID NO. 1612
 NTUA-TWIN LAKES WELL/NGWSP REACH 12A CONNECTION**

SET #	SENT TO	PHONE # FAX #	DATE	ADDENDUM No. 1	RETURNED
13	Dallago Corporation 2411 E. Aztec Gallup, NM 87301	Phone: (505) 722-6638 Fax: (505) 863-9433	Pick Up 5/19/2016		